
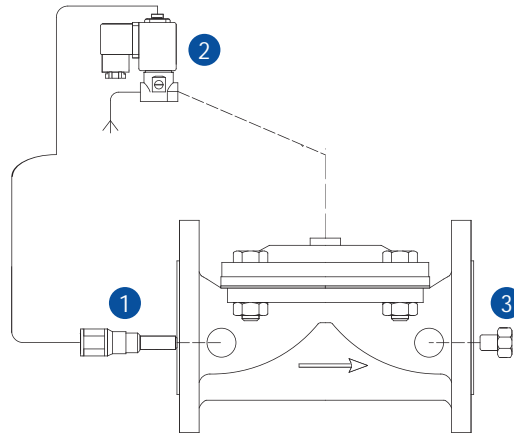


600 SERIES

66-EL

SOLENOID CONTROLLED VALVE

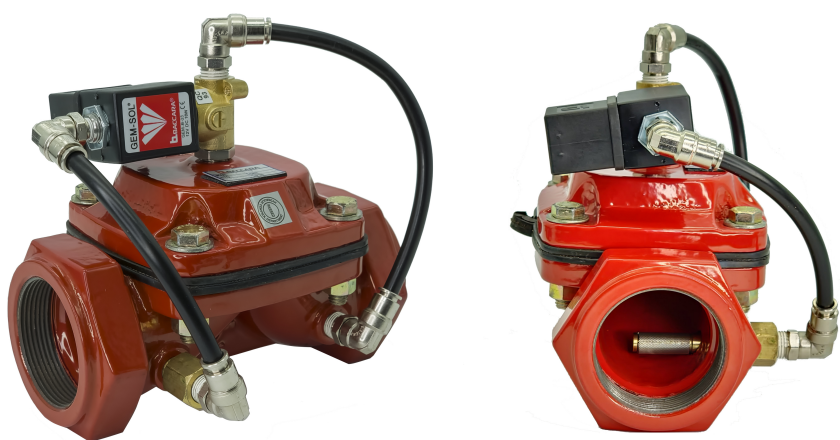

● DESCRIPTION

Baccara “EL” model valve is the hydraulic control valve operated by line pressure and designed to ensure opening/closing process by means of built-in 3/2-way solenoid pilot valves controlled remotely with electric signal. Electric signal for solenoid pilot valves is ensured by means of a control device, time relay, main switch and PLC control units etc. Opening/ Closing process may be realized easily thanks to manual control on solenoid pilot valve. Depending on desire, 24V AC 50Hz/60Hz or 12V DC, 9V DCLATCH and 12V DC latch normally open (N.O.) or normally closed (N.C.) solenoid coils may be used on main valve.

● PURCHASE SPECIFICATIONS

The valve will be direct diaphragm closing automatic hydraulic control valve which works with line pressure. No wearable parts such as stem, bearing and seat exist in main valve body. The valve position will be controlled by a hand operated selector valve.

Operating Pressure : 0.5 -11 bar (DN40) Standard
: 0.7 - 16 bar (DN50 to DN80) Standard
Temperature : -10°C - 80°C

● CONTROL SYSTEM COMPONENTS

- 1 In-line Finger Filter
- 2 Solenoid Pilot Valve
- 3 Plug


● QUICK SIZING

Valve size same as main line or one size smaller.
Maximum flow speed for continuous operation 5.5 m/sec
(18 ft/sec)

● TECHNICAL INFORMATION

Valve connection type : BSP
Coating : Epoxy
Hydraulic Connections : Reinforced Nylon Tube

TYPICAL APPLICATION

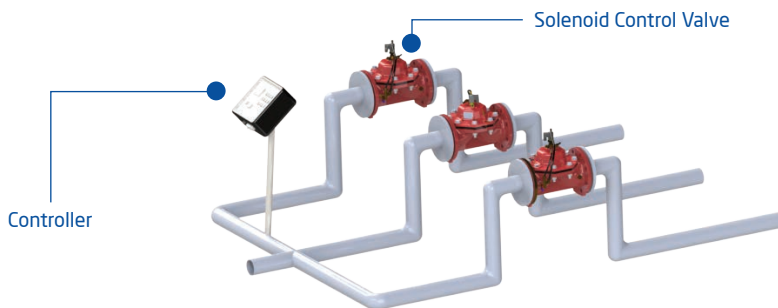

Baccara Solenoid Controlled Valves can be used with a local control unit or advanced automatin systems.