


# ELECTRIC/HYDRAULIC VALVES | GEM & G75

GEM-S | Pilot operated 3/8", 1/2" 2 Way NC, NO

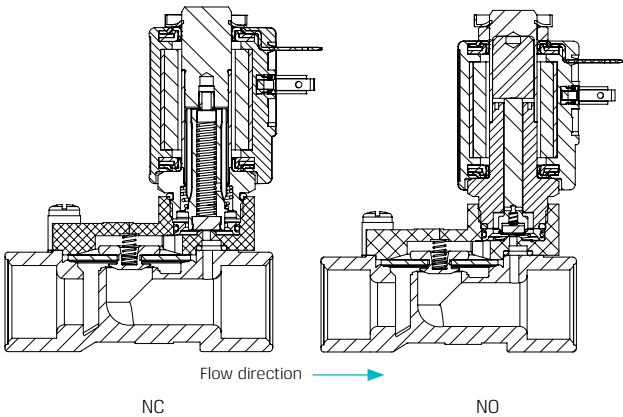

Technical Data

Function	2 Way NC, NO
Ports size	3/8", 1/2" BSP & NPT
Orifice size	12mm
Pressure range	0.5 to 12 bar
Kv (l/min)	35 l/min
Temperature range	<b>Fluid</b> : 5°C to 50°C (no freezing) <b>Ambient</b> : -10°C to 50°C
Materials in contact with media	<b>Main Valve:</b> Reinforced Nylon <b>Solenoid Operator:</b> Stainless Steel AISI 300 & 400 series <b>Seals:</b> NBR, FKM, EPDM
Solenoid	GEM-SOL 2W NC solenoids, all voltages.
Coil voltage	• Voltage and power consumption - see table • All Baccara coil voltages are ± 10% of nominal
Standard protection class	IP65 with connector * Option : IP68 (please refer to GEM-BP Coil)


Voltage & Power Consumption

V	AC (W)						DC (W)		
	50 Hz			60 Hz			10	5.5	3.5
6							•		
12	•			•			•		
24	•			•			•		
48	•			•			•		
110	•			•			•		
120	•			•					
220	•			•			•		
230	•								
240	•			•			•		

• Available options

GEM-S | Pilot operated 3/8", 1/2" 2 Way NC, NO

Dimensions

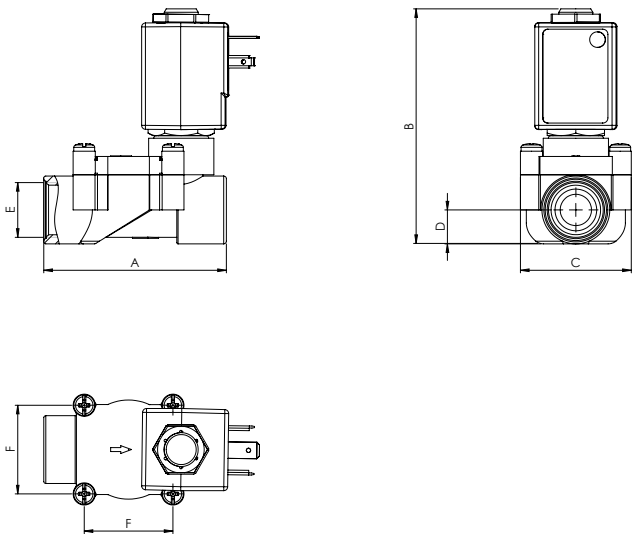

Function	A	B	C	D	E	F
NC	70	90	42.5	13	3/8" & 1/2"	34
NO	70	93.4	42.5	13	3/8" & 1/2"	34

How to Order

GEM-S	-	BODY	PORT		FUNCTION		SEALS		MANUAL OVERRIDE		-	VOLTAGE		POWER		CONNECTOR	
		Plastic	4	3/8" BSP	30	2W NC	1	NBR	N	None	0	W/out coil	0	No coil	0	without	0
				3/8" NPT	31	2WNO	2a	FKM	V			6	1	AC8W 50Hz	1	with	1
				1/2" BSP	40			EPDM	E			12	2	AC8W 60Hz	2	with LED	2
				1/2" NPT	41							24	3	DC10W	3	with bi-color LED	3
										48	4			flying leads coil	4		
												110	5			with 1/2" Hub	5
												120	6			surge protec- tion with LED	6
												220	7A			connector with moulded cable	7
												230	7			other	9
												240	8				
												Latch/ other <sup>(1)</sup>	9				

Example : GEM-S-4401N0-321

Example : GEM-S-4401NO-321  
GEM-SOL pilot operated, 1/2" BSP, 2W NC, NBR, no manual override, 24V AC 8W 60Hz with connector

GEM-S - 4 40 1 N 0 - 3 2 1

(1) For specifying Latch type coil, please refer to GEM-A3P valve - How to Order table

\* To order valves manufactured according to your specific requirements, please contact our technical sales department