


T TYPE DISC FILTERS

Focused on multiple filtration grades, high efficiency and water saving advantages. Keeps the filter clean for longer.

TYPICAL APPLICATION

Applied to medium flow rate water filtering for landscape irrigation, agriculture irrigation, municipal garden irrigation.

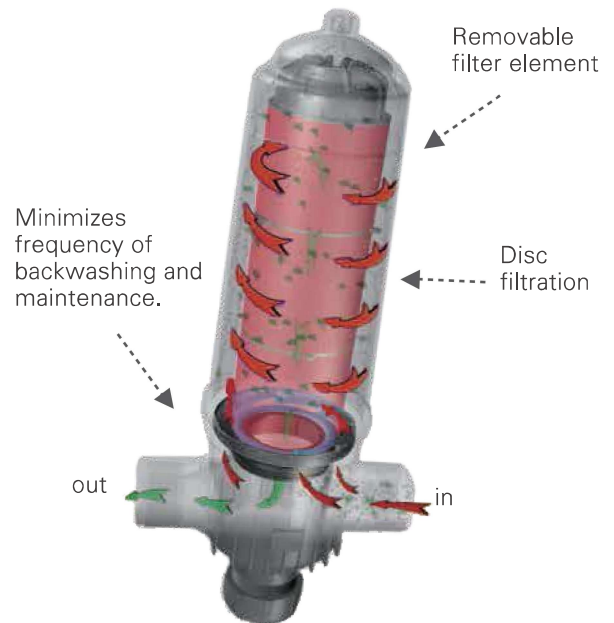

FEATURE & ADVANTAGE

- ✓ Manual cleaning
- ✓ Resistant to chemical products
- ✓ Easy installation, easy maintenance
- ✓ Water and energy saving
- ✓ BSP, NPT or grooved connections for option which can be installed in any position
- ✓ Maximum quality and safety in filtration
- ✓ Robustness. Base and lid manufactured in high quality thermoplastic
- ✓ Threaded tightening nut. High security with easy opening and closing
- ✓ Equipped with pressure gauges intakes
- ✓ Fullfillment of any filtration needs

MODEL & SPECIFICATION


MODEL	CONNECTIONS BSP/NPT	FILTRATION GRADES (mesh)	MAX FLOW (m ³ /h)	MAX PRESSURE (bar)	FILTERING SURFACE (cm ²)	WEIGHTS (kg)
MTDF-50	2"	40/80/120/150/200/300	30	10	1200	6.2
MTDF-50-L	2"	40/80/120/150/200/300	30	10	1700	8.2
MTDF-65	2-1/2"	40/80/120/150/200/300	40	10	1200	6.4
MTDF-65-L	2-1/2"	40/80/120/150/200/300	40	10	1700	8.3
MTDF-80-X	3"	40/80/120/150/200/300	50	10	1200	6.5
MTDF-80	3"	40/80/120/150/200/300	50	10	1700	8.3

DIMENSION

MODEL	H (mm)	W (mm)	D (mm)
MTDF-50	620	320	220
MTDF-50-L	740	320	220
MTDF-65	630	320	220
MTDF-65-L	750	320	220
MTDF-80-X	630	320	220
MTDF-80	750	320	220

HEAD LOSS

T TYPE FILTER HEAD LOSS(130 micron/ 120mesh)

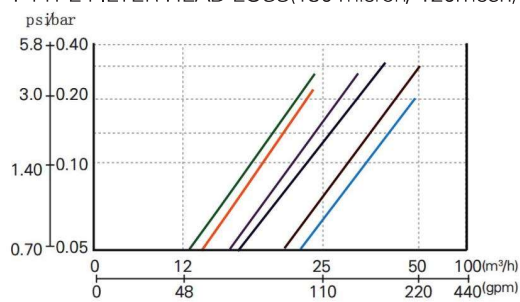

Note: The flow rate will fluctuate with different water quality.

