


T TYPE SCREEN FILTERS

Multiple filtration grades, high efficiency and water saving advantages. Delicate weaving craftsmanship of stainless steel screen with different micron-grade filter screen to meet different needs which enjoying highly flexible, corrosion, acid and alkaline resistant features.

TYPICAL APPLICATION

Applied to medium flow rate water filtering for landscape irrigation, agriculture irrigation, municipal garden and landscape irrigation.

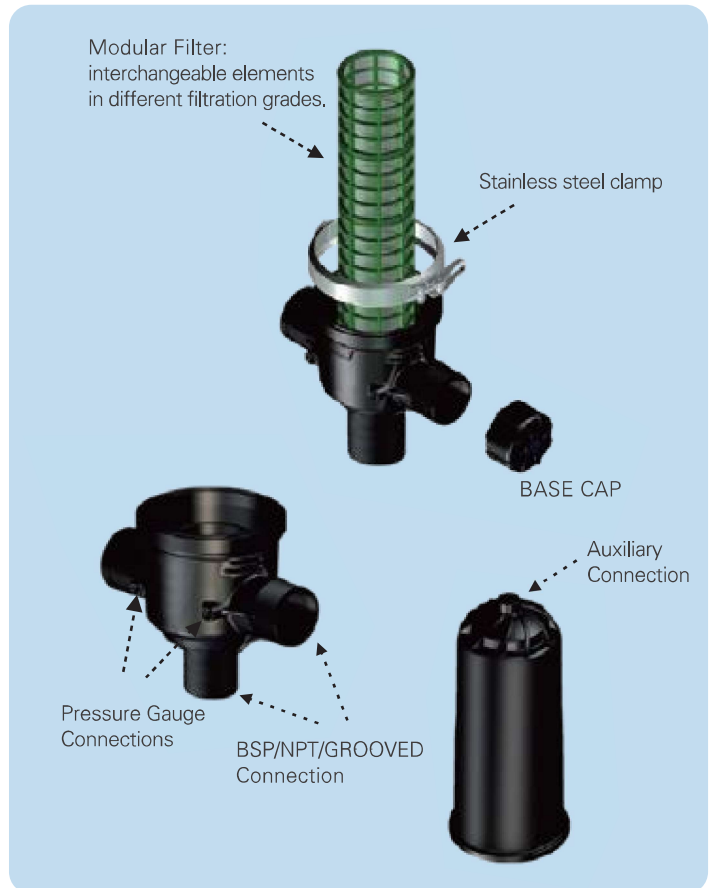

FEATURE & ADVANTAGE

- ✓ Easy installation, easy maintenance
- ✓ Durable & stainless steel filter screen with corrosion, acid and alkaline resistant features
- ✓ Water and energy saving
- ✓ BSP, NPT or grooved connections for option which can be installed in any position
- ✓ Maximum quality and safety in filtration
- ✓ Robustness. Base and lid manufactured in high quality thermoplastic
- ✓ Threaded tightening nut. High security with easy opening and closing
- ✓ Fullfillment of any filtration needs

MODEL & SPECIFICATION

MODEL	CONNECTIONS BSP/NPT	FILTRATION GRADES (mesh)	MAX FLOW (m ³ /h)	MAX PRESSURE (bar)	FILTERING SURFACE (cm ²)	WEIGHTS (kg)
MTSF-50	2"	40/80/120/150/200/300	30	10	1200	4.8
MTSF-50-L	2"	40/80/120/150/200/300	30	10	1700	5.3
MTSF-65	2-1/2"	40/80/120/150/200/300	40	10	1200	4.9
MTSF-65-L	2-1/2"	40/80/120/150/200/300	40	10	1700	5.5
MTSF-80-X	3"	40/80/120/150/200/300	50	10	1200	5.1
MTSF-80	3"	40/80/120/150/200/300	50	10	1700	5.8

DIMENSION

MODEL	H (mm)	W (mm)	D (mm)
MTSF-50	620	320	220
MTSF-50-L	740	320	220
MTSF-65	630	320	220
MTSF-65-L	750	320	220
MTSF-80-X	630	340	220
MTSF-80	750	340	220

HEAD LOSS

T TYPE FILTER HEAD LOSS(130 micron/ 120mesh)

