

	TUBE SIZE									
	Metric Size									
Model	BT0425	BT0503	BT0604	BT0806	BT1075	BT1080 <sup>△</sup>	BT1209	BT1210 <sup>△</sup>	BT1411	BT1412 <sup>△</sup>
Tube O.D (mm)	4	5	6	8	10	10	12	12	14	14
Tube I.D (mm)	2.5	3	4	6	7.5	8	9	10	11	12
Max. operating* pressure (bar)	32	33	28	22	21	17	19	14	12	9
DIN Max. operating pressure (bar) 73378	31	33	27	19	19	15	19	-	-	-
Minimum ● bend radius (mm)	31	35	45	55	80	80	150	150	170	170


Colours: Black • Red • Green • Yellow • Blue • White translucent

 Special order <sup>△</sup>

	TUBE SIZE			
	Inch Size			
Model	BT3/16	BT1/4	BT3/8	BT1/2
Tube O.D (In.)	3/16"	1/4"	3/8"	1/2"
Tube I.D (In.)	1.16"	1.71"	2.76"	3.74"
Max. operating * pressure (bar)	32	26	26	20
Minimum ● bend radius (In.)	1-1/2"	2"	3.1"	5.5"

Colours: Black • Red • Green • Yellow • Blue • White translucent

### Burst Pressure Characteristics Curve

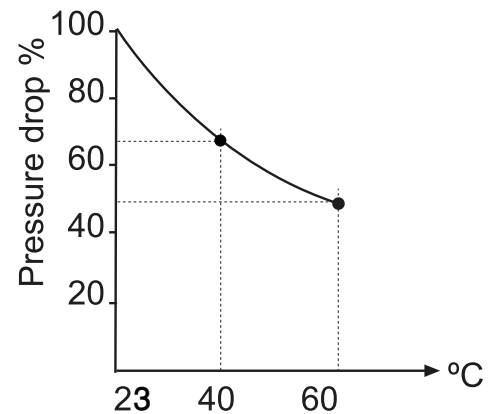

### Specifications

Operating fluid	Air
Operating temperature	-10° to 60° C
Material	Nylon 12 (white trans. Nylon 11)

- \* Ambient and fluid temperature 23°C
- For Nylon 12

### How to order

