



**Working pressure**  
Up to 14 BAR  
(200 psi) at 20 °C



**Temperature**  
4 - 90 °C  
(subject to application)


part	material
Body	Nylon 6-6
Internal parts	Acetal
Spring + Ball	Stainless Steel



## Quick Release Socket

Cat. No.	F (BSPT)	L mm	SW	O-ring	Color
22080004000	1/4"	44.0	19	NBR	<span style="color: red;">■</span> Red
22081104002	1/4"	44.0	19	EPDM	<span style="color: red;">■</span> Red
22080004001	1/4"	44.0	19	EPDM	<input type="checkbox"/> White


## Acetal



## Plug - External Thread

Cat. No.	M (BSPT)	L mm	SW	Color
12081404006	1/4"	31.2	17	<span style="color: red;">■</span> Red


Note: Packing 25 unit



## Plug - Internal Thread

Cat. No.	F (BSPT)	L mm	SW	Color
12081504006	1/4"	28.6	17	<span style="color: red;">■</span> Red

Note: Packing 25 unit

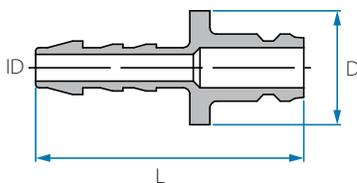

## Plug - Hose Connector

Cat. No.	Tube ID mm	L mm	D	Color
12081645006	5	37.8	16.7	
12081646006	6	39.8	16.7	
12081648006	8	43.2	16.8	<span style="color: red;">■</span> Red
12081650006	10	43.2	16.8	
12081652006	12	43.2	16.8	

Note: Packing 25 unit